

DRSKABEL

Specifications

Cross Section : 3x4mm² H05VV-F

Voltage : 300/500V


Diameter :
(mm) 11,3

Weight :
(kg/km) 252

Conductor DS Resistance Ohm/km (20°C)
4,95

Current Carrying Capacity

In Air at 30°C **32 A**

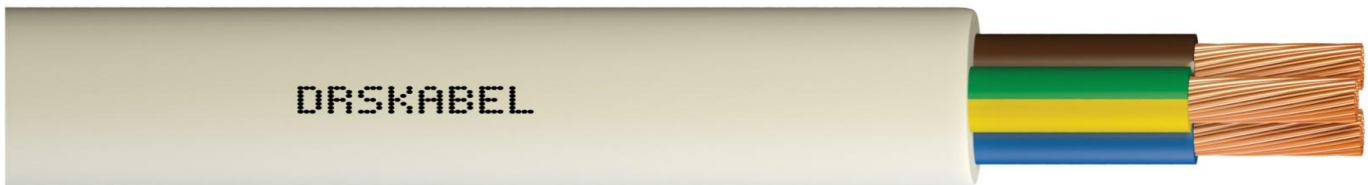

3

2

1

Nr.	Construction	Property	Net Weight (kg/km)	Detail
1	Cu conductor	Flex copper Class 5	96,2	50x0,30mm
2	Insulation	Polyvinly chloride	37,8	Et Kal: 0,80mm thickness
3	Outer sheath	Polyvinly chloride	118,3	Et Kal: 1,20mm thickness