

# DRS KABEL

## Specifications

Cross Section : 4x4 mm<sup>2</sup> H05VV-F

Voltage : 300/500V


Diameter :  
(mm) 12,3

Weight :  
(kg/km) 283

Conductor DS Resistance Ohm/km (20°C)  
4,95

Current Carrying Capacity

In Air at 30°C **32 A**

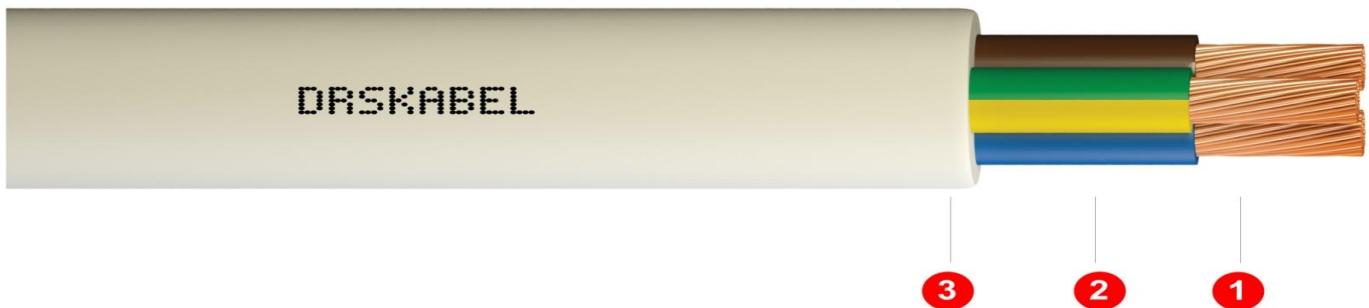

Nr.	Construction	Property	Net Weight (kg/km)	Detail
1	Cu conductor	Flex copper Class 5	128,63	50x0,30mm
2	Insulation	Polyvinly chloride	52,17	Et Kal: 0,80mm thickness
3	Outer sheath	Polyvinly chloride	102,27	Et Kal: 1,20mm thickness