

# DRS KABEL

## Specifications

**Cross Section** : 4x150mm<sup>2</sup> NYY (YVV-R)

**Voltage** : 0,6/1kV (1,2kV)

**Diameter** :  
(mm) 50,1

**Weight** :  
(kg/km) 7.519


**Conductor DS Resistance Ohm/km (20°C)**

0,124

### Current Carrying Capacity

*In Ground at 20 °C* **359 A**

*In Air at 30 °C* **326 A**

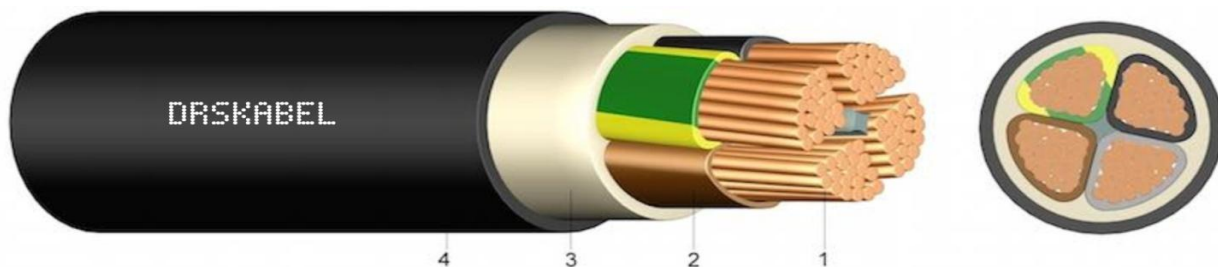

Nr.	Construction	Property	Net Weight (kg/km)	Detail
1	<b>Cu conductor</b>	Stranded copper	5200	30x2,62mm
2	<b>Insulation</b>	Polyvinly chloride	572	Et Kal: 1,80mm thickness
3	<b>Filler</b>	Polyvinly chloride	1235	Et Kal: 1,20mm thickness
4	<b>Outer sheath</b>	Polyvinly chloride	512	Et Kal: 2,20mm thickness