

DRS KABEL

Specifications

Cross Section : 4x1,5mm² N2XRY (YXZ2V-R)

Voltage : 0,6/1kV (1,2kV)

Diameter :
(mm) 13

Weight :
(kg/km) 340


Conductor DS Resistance Ohm/km (20°C)

12,1

Current Carrying Capacity

In Ground at 20 °C 31 A

In Air at 30 °C 25 A

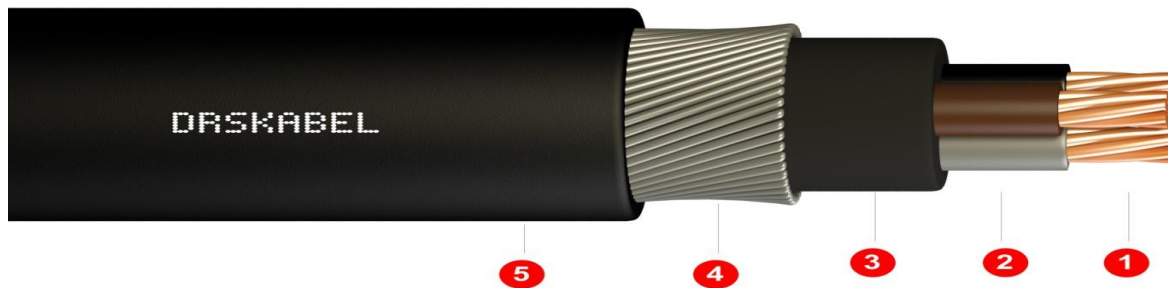

Nr.	Construction	Property	Net Weight (kg/km)	Detail
1	Cu conductor	Stranded copper Class 2	53	7x0,53mm
2	Insulation	Cross linkable polyethylene	17	Et Kal: 0,70mm thickness
3	Filler	Polyvinly chloride	47	Et Kal: 0,80mm thickness
4	Armour	Galvanized round steel wire	142	35x0,80mm
5	Outer sheath	Polyvinly chloride	81	Et Kal: 1,50mm thickness