

DRS KABEL

Specifications

Cross Section : 4x10mm² N2XRY (YXZ2V-R)

Voltage : 0,6/1kV (1,2kV)

Diameter :
(mm) 20,3


Weight :
(kg/km) 1.037

Conductor DS Resistance Ohm/km (20°C)
1,83

Current Carrying Capacity

In Ground at 20 °C **87 A**

In Air at 30 °C **75 A**

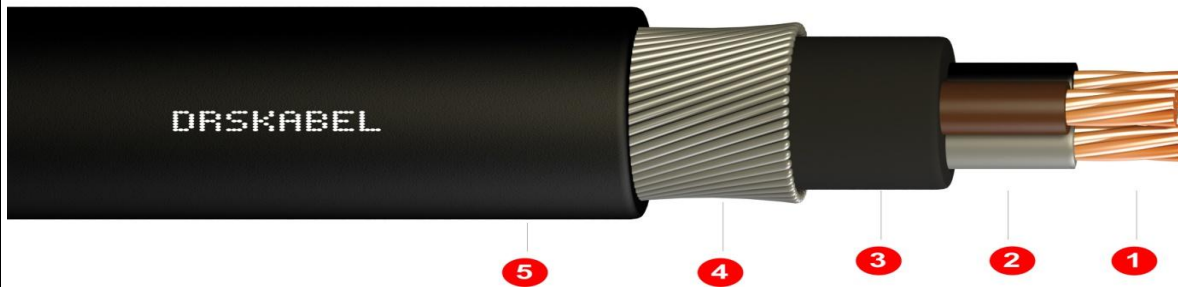

Nr.	Construction	Property	Net Weight (kg/km)	Detail
1	Cu conductor	Stranded copper Class 2	353	7x1,35mm
2	Insulation	Cross linkable polyethylene	39	Et Kal: 0,70mm thickness
3	Filler	Polyvinly chloride	126	Et Kal: 1,00mm thickness
4	Armour	Galvanized round steel wire	386	39x1,25mm
5	Outer sheath	Polyvinly chloride	133	Et Kal: 1,50mm thickness