

# DRS KABEL

## Specifications

Cross Section : 4x16mm<sup>2</sup> N2XRY (YXZ2V-R)

Voltage : 0,6/1kV (1,2kV)

Diameter :  
(mm) 23,2


Weight :  
(kg/km) 1.500

Conductor DS Resistance Ohm/km (20°C)  
1,15

### Current Carrying Capacity

In Ground at 20 °C **113 A**

In Air at 30 °C **100 A**

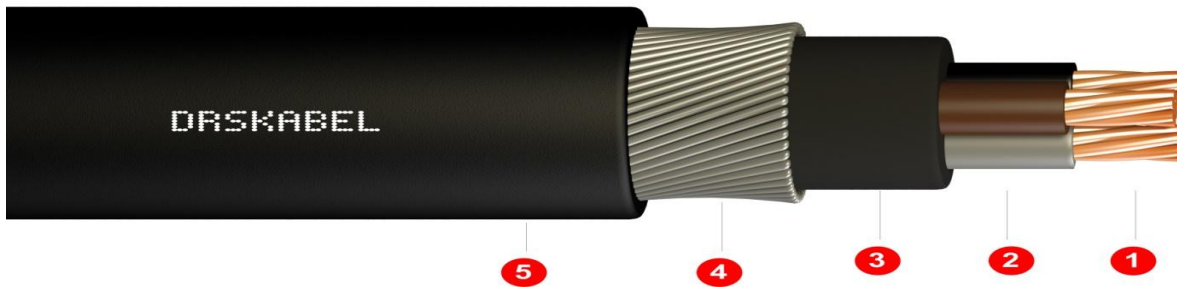

Nr.	Construction	Property	Net Weight (kg/km)	Detail
1	Cu conductor	Stranded copper Class 2	557	7x1,73mm
2	Insulation	Cross linkable polyethylene	45	Et Kal: 0,70mm thickness
3	Filler	Polyvinly chloride	160	Et Kal: 1,00mm thickness
4	Armour	Galvanized round steel wire	585	36x1,60mm
5	Outer sheath	Polyvinly chloride	153	Et Kal: 1,50mm thickness