

DRS KABEL

Specifications

Cross Section : 4x2,5mm² N2XRY (YXZ2V-R)

Voltage : 0,6/1kV (1,2kV)

Diameter :
(mm) 13,9


Weight :
(kg/km) 434

Conductor DS Resistance Ohm/km (20°C)
7,41

Current Carrying Capacity

In Ground at 20 °C **31 A**

In Air at 30 °C **25 A**

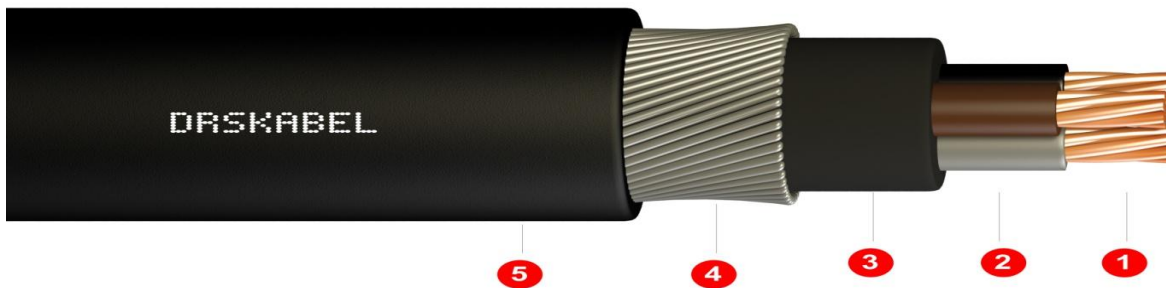

Nr.	Construction	Property	Net Weight (kg/km)	Detail
1	Cu conductor	Stranded copper Class 2	88,88	7x0,66mm
2	Insulation	Cross linkable polyethylene	23	Et Kal: 0,70mm thickness
3	Filler	Polyvinly chloride	61	Et Kal: 0,80mm thickness
4	Armour	Galvanized round steel wire	166	41x0,80mm
5	Outer sheath	Polyvinly chloride	95	Et Kal: 1,50mm thickness