

# DRS KABEL

## Specifications

Cross Section : 4x25mm<sup>2</sup> N2XRY (YXZ2V-R)

Voltage : 0,6/1kV (1,2kV)

Diameter :  
(mm) 26,6


Weight :  
(kg/km) 2.021

Conductor DS Resistance Ohm/km (20°C)  
0,727

### Current Carrying Capacity

In Ground at 20 °C **146 A**

In Air at 30 °C **136 A**

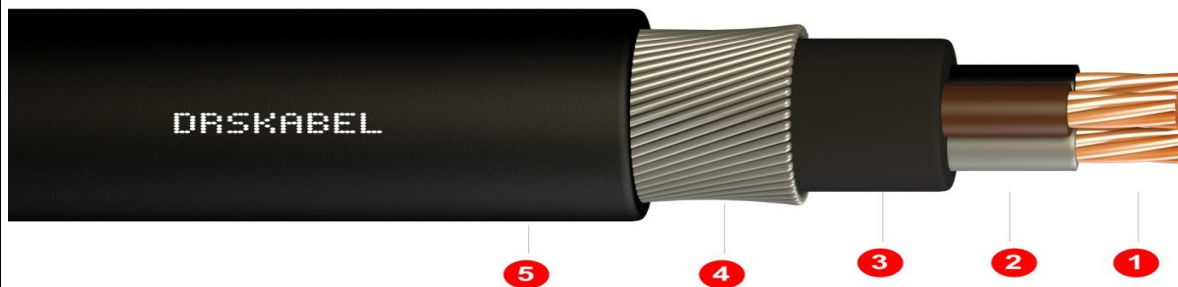

Nr.	Construction	Property	Net Weight (kg/km)	Detail
1	Cu conductor	Stranded copper Class 2	873	7x2,20mm
2	Insulation	Cross linkable polyethylene	71	Et Kal: 0,90mm thickness
3	Filler	Polyvinly chloride	218	Et Kal: 1,00mm thickness
4	Armour	Galvanized round steel wire	682	42x1,60mm
5	Outer sheath	Polyvinly chloride	177	Et Kal: 1,50mm thickness