

DRS KABEL

Specifications

Cross Section : 4x35mm² N2XRY (YXZ2V-R)

Voltage : 0,6/1kV (1,2kV)

Diameter :
(mm) 29,9


Weight :
(kg/km) 2.582

Conductor DS Resistance Ohm/km (20°C)
0,524

Current Carrying Capacity

In Ground at 20 °C **176 A**

In Air at 30 °C **165 A**

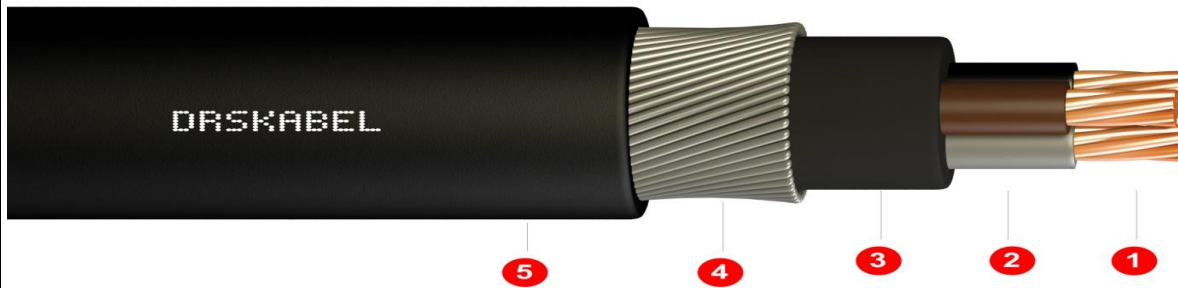

Nr.	Construction	Property	Net Weight (kg/km)	Detail
1	Cu conductor	Stranded copper Class 2	1214	7x2,62mm
2	Insulation	Cross linkable polyethylene	82	Et Kal: 0,90mm thickness
3	Filler	Polyvinly chloride	294	Et Kal: 1,20mm thickness
4	Armour	Galvanized round steel wire	779	48x1,60mm
5	Outer sheath	Polyvinly chloride	213	Et Kal: 1,60mm thickness