

# DRS KABEL

## Specifications

Cross Section : 4x4mm<sup>2</sup> N2XRY (YXZ2V-R)

Voltage : 0,6/1kV (1,2kV)

Diameter :  
(mm) 15,6


Weight :  
(kg/km) 521

Conductor DS Resistance Ohm/km (20°C)  
4,61

### Current Carrying Capacity

In Ground at 20 °C 52 A

In Air at 30 °C 43 A

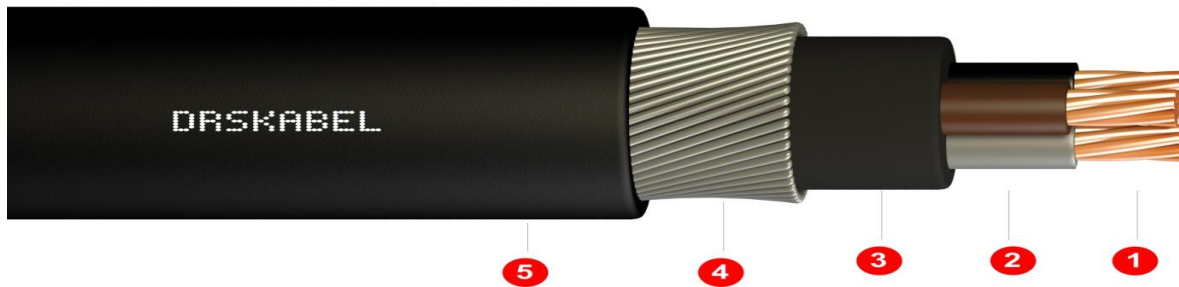

Nr.	Construction	Property	Net Weight (kg/km)	Detail
1	Cu conductor	Stranded copper Class 2	141,67	7x0,85mm
2	Insulation	Cross linkable polyethylene	26,27	Et Kal: 0,70mm thickness
3	Filler	Polyvinly chloride	70,84	Et Kal: 0800mm thickness
4	Armour	Galvanized round steel wire	182,58	45x0,80mm
5	Outer sheath	Polyvinly chloride	99,62	Et Kal: 1,50mm thickness