

# DRS KABEL

## Specifications

Cross Section : 4x6mm<sup>2</sup> N2XRY (YXZ2V-R)

Voltage : 0,6/1kV (1,2kV)

Diameter :  
(mm) 18,4


Weight :  
(kg/km) 807

Conductor DS Resistance Ohm/km (20°C)  
3,08

### Current Carrying Capacity

In Ground at 20 °C **65 A**

In Air at 30 °C **54 A**

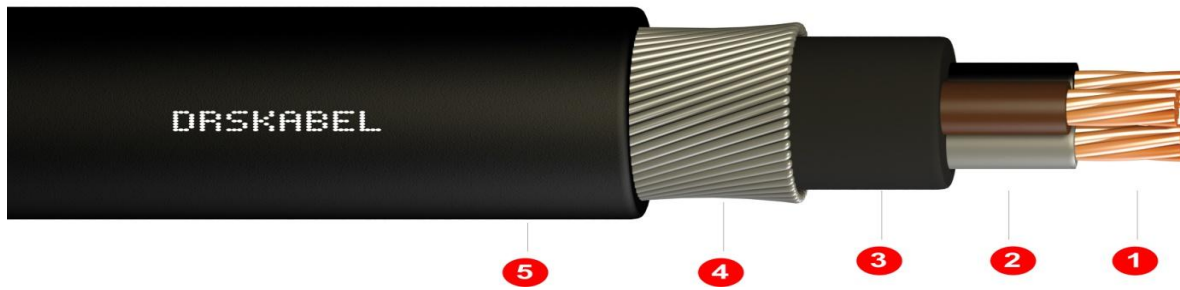

Nr.	Construction	Property	Net Weight (kg/km)	Detail
1	Cu conductor	Stranded copper Class 2	208	7x1,03mm
2	Insulation	Cross linkable polyethylene	31	Et Kal: 0,70mm thickness
3	Filler	Polyvinyl chloride	101	Et Kal: 1,00mm thickness
4	Armour	Galvanized round steel wire	347	35x1,25mm
5	Outer sheath	Polyvinyl chloride	120	Et Kal: 1,50mm thickness