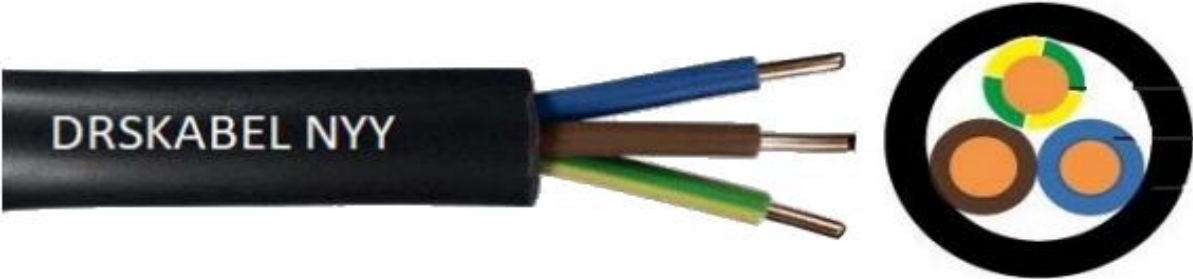


DRS KABEL

Specifications				
Cross Section : 3x1,5mm ² NYY (YVV-U)				
Voltage : 0,6/1kV (1,2kV)				
Diameter : 10,3 (mm)			Weight : 171 (kg/km)	
Conductor DS Resistance Ohm/km (20°C) 12,1				
Current Carrying Capacity				
In Ground at 20 °C 27 A			In Air at 30 °C 19,5 A	
				
Nr.	Construction	Property	Net Weight (kg/km)	Detail
1	Cu conductor	Solid copper	40	1x1,36mm
2	Insulation	Polyvinly chloride	26	Et Kal: 0,80mm thickness
3	Filler	Polyvinly chloride	40	Et Kal: 0,40mm thickness
4	Outer sheath	Polyvinly chloride	65	Et Kal: 1,50mm thickness