

# DRSKABEL

## Specifications

**Cross Section** : 3x2,5mm<sup>2</sup> NYY (YVV-U)

**Voltage** : 0,6/1kV (1,2kV)

**Diameter** :  
(mm) 11,1


**Weight** :  
(kg/km) 215

**Conductor DS Resistance Ohm/km (20°C)**  
7,41

### Current Carrying Capacity

**In Ground at 20 °C 36 A**

**In Air at 30 °C 25 A**

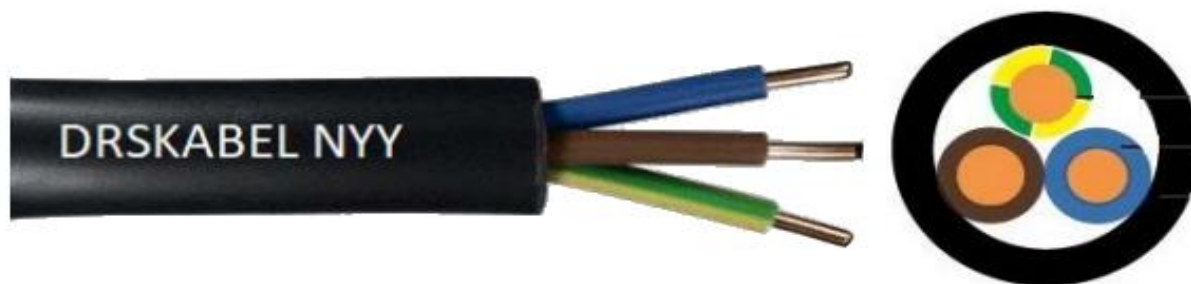

Nr.	Construction	Property	Net Weight (kg/km)	Detail
1	<b>Cu conductor</b>	Solid copper	66	1x1,75mm
2	<b>Insulation</b>	Polyvinly chloride	32,27	Et Kal: 0,80mm thickness
3	<b>Filler</b>	Polyvinly chloride	47	Et Kal: 0,40mm thickness
4	<b>Outer sheath</b>	Polyvinly chloride	70	Et Kal: 1,50mm thickness