

# DRS KABEL

## Specifications

Cross Section : 3x2,5mm<sup>2</sup> H05VV-F

Voltage : 300/500V


Diameter :  
(mm) 10

Weight :  
(kg/km) 166

Conductor DS Resistance Ohm/km (20°C)  
7,98

Current Carrying Capacity

In Air at 30°C 25 A

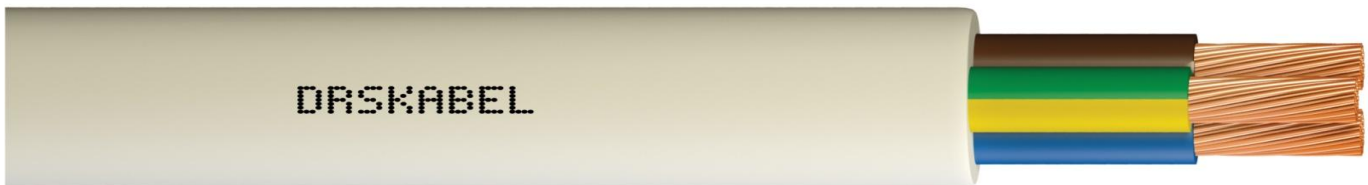

3

2

1

Nr.	Construction	Property	Net Weight (kg/km)	Detail
1	Cu conductor	Flex copper Class 5	60	45x0,25mm
2	Insulation	Polyvinly chloride	32	Et Kal: 0,80mm thickness
3	Outer sheath	Polyvinly chloride	74	Et Kal: 1,10mm thickness