

DRS KABEL

Specifications

Cross Section : 2x1,5mm² H05VV-F

Voltage : 300/500V


Diameter :
(mm) 7,8

Weight :
(kg/km) 91

Conductor DS Resistance Ohm/km (20°C)
13,300

Current Carrying Capacity

In Air at 30°C 16 A

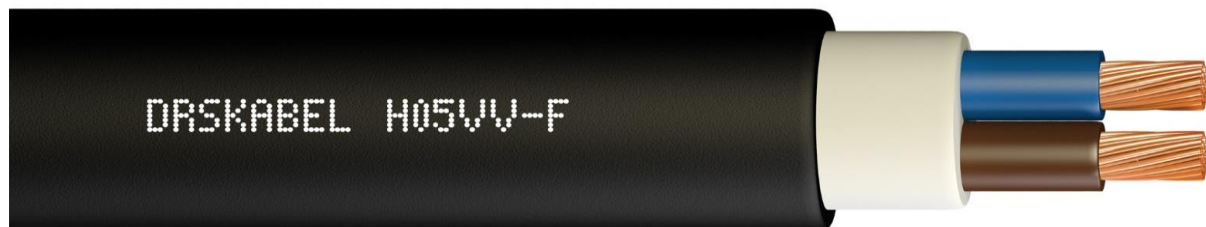

Nr.	Construction	Property	Net Weight (kg/km)	Detail
1	Cu conductor	Flex copper Class 5	24	30x0,24mm
2	Insulation	Polyvinly chloride	17,6	Wall Thickness: 0,80mm
3	Outer sheath	Polyvinly chloride	49,99	Wall Thickness: 0,80mm