

# DRS KABEL

## Specifications

Cross Section : 2x10mm<sup>2</sup> H05VV-F

Voltage : 450/750V


Diameter :  
(mm) 15,8

Weight :  
(kg/km) 424

Conductor DS Resistance Ohm/km (20°C)  
1,910

Current Carrying Capacity

In Air at 30°C 59 A

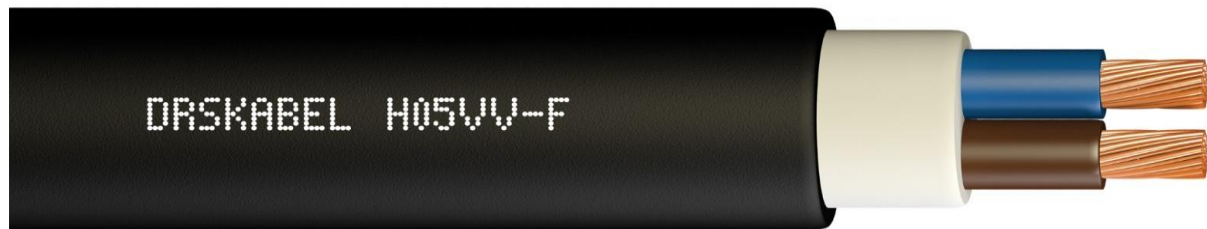

Nr.	Construction	Property	Net Weight (kg/km)	Detail
1	Cu conductor	Flex copper Class 5	166	73X0,40 mm
2	Insulation	Polyvinly chloride	47,55	Wall Thickness:1 mm
3	Outer sheath	Polyvinly chloride	210,45	Wall Thickness:1,80 mm