

# DRS KABEL

## Specifications

Cross Section : 2x4mm<sup>2</sup> H05VV-F

Voltage : 300/500V


Diameter :  
(mm) 10,4

Weight :  
(kg/km) 179

Conductor DS Resistance Ohm/km (20°C)  
4,95

Current Carrying Capacity

In Air at 30°C **32 A**

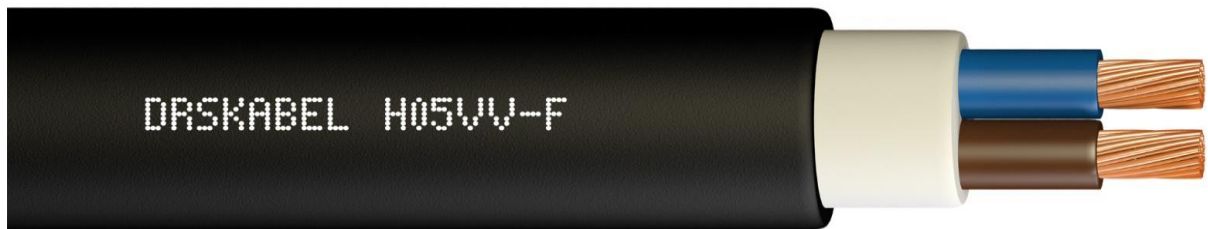

| Nr. | Construction | Property               | Net Weight (kg/km) | Detail                 |
|-----|--------------|------------------------|--------------------|------------------------|
| 1   | Cu conductor | Flex copper<br>Class 5 | 65                 | 51x0,30mm              |
| 2   | Insulation   | Polyvinly chloride     | 24,62              | Wall Thickness: 0,80mm |
| 3   | Outer sheath | Polyvinly chloride     | 89,53              | Wall Thickness: 1,10mm |