

DRS KABEL

Specifications

Cross Section : 2x6mm² H05VV-F

Voltage : 450/750V


Diameter :
(mm) 12,2

Weight :
(kg/km) 251

Conductor DS Resistance Ohm/km (20°C)
3,300

Current Carrying Capacity

In Air at 30°C **43 A**

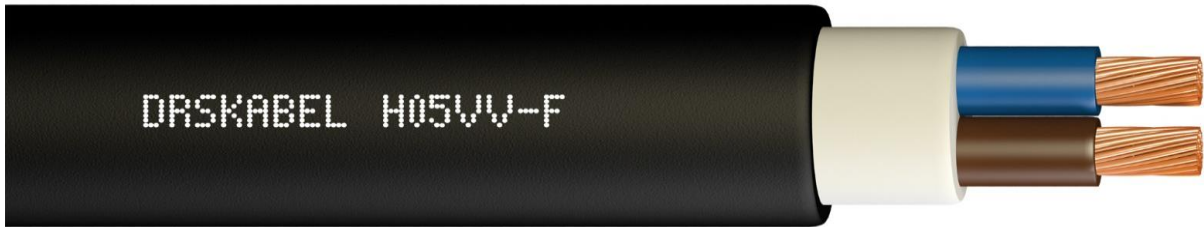

Nr.	Construction	Property	Net Weight (kg/km)	Detail
1	Cu conductor	Flex copper Class 5	96	75X0,30 mm
2	Insulation	Polyvinly chloride	29,09	Wall Thickness:0,80 mm
3	Outer sheath	Polyvinly chloride	125,7	Wall Thickness:1,40 mm