

# DRSKABEL

## Specifications

**Cross Section** : 4x35mm<sup>2</sup> NYY (YVV-R)

**Voltage** : 0,6/1kV (1,2kV)

**Diameter** :  
(mm) 27,7

**Weight** :  
(kg/km) 1.906


**Conductor DS Resistance Ohm/km (20°C)**

0,524

### Current Carrying Capacity

*In Ground at 20 °C* **159 A**

*In Air at 30 °C* **126 A**

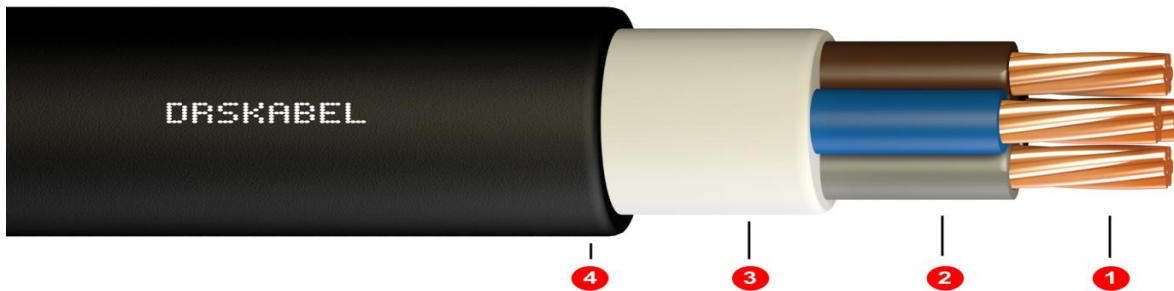

Nr.	Construction	Property	Net Weight (kg/km)	Detail
1	<b>Cu conductor</b>	Stranded copper	1214	7x2,62mm
2	<b>Insulation</b>	Polyvinly chloride	186	Et Kal: 1,20mm thickness
3	<b>Filler</b>	Polyvinly chloride	321	Et Kal: 1,10mm thickness
4	<b>Outer sheath</b>	Polyvinly chloride	185	Et Kal: 1,50mm thickness