

DRS KABEL

Specifications

Cross Section : 4x4mm² NYY (YVV-R)

Voltage : 0,6/1kV (1,2kV)

Diameter :
(mm) 14,9


Ağırlık / Weight :
(kg/km) 402

Conductor DS Resistance Ohm/km (20°C)
4,61

Current Carrying Capacity

In Ground at 20 °C 47 A

In Air at 30 °C 34 A

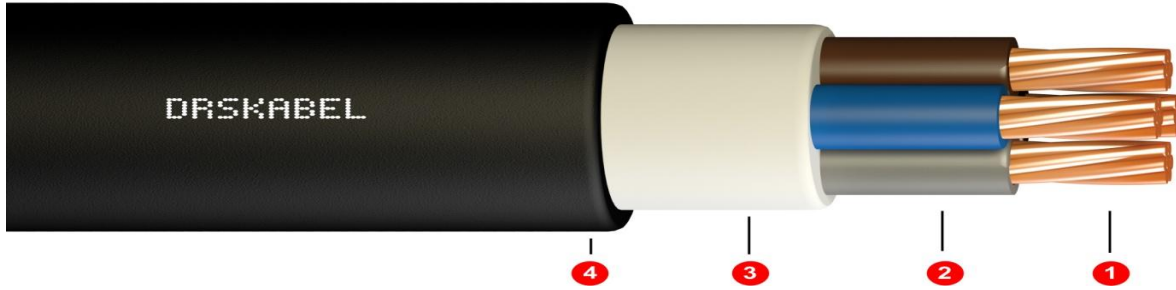

Nr.	Construction	Property	Net Weight (kg/km)	Detail
1	Cu conductor	Stranded copper	141,67	7x0,85mm
2	Insulation	Polyvinly chloride	69,17	Et Kal: 1,00mm thickness
3	Filler	Polyvinly chloride	93	Et Kal: 0,50mm thickness
4	Outer sheath	Polyvinly chloride	98	Et Kal: 1,50mm thickness