

DRS KABEL

Specifications

Cross Section : 5x16mm² NYY (YVV-R)

Voltage : 0,6/1kV (1,2kV)

Diameter :
(mm) 22,8

Weight :
(kg/km) 887


Conductor DS Resistance Ohm/km (20°C)

1,15

Current Carrying Capacity

In Ground at 20 °C **112 A**

In Air at 30 °C **98 A**

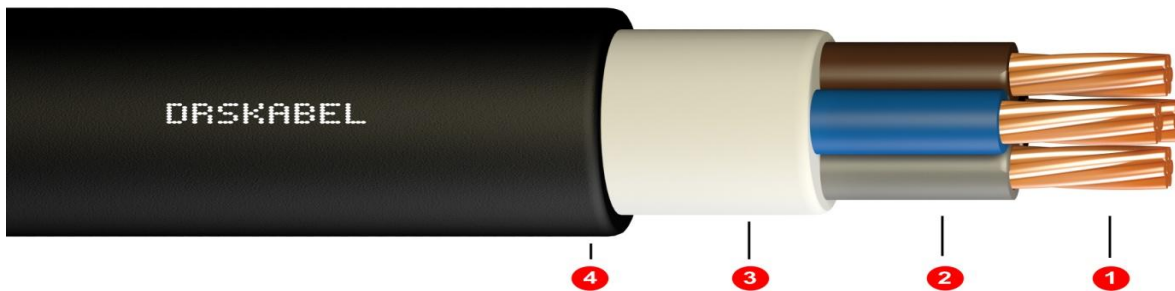

Nr.	Construction	Property	Net Weight (kg/km)	Detail
1	Cu conductor	Stranded copper	444	7x1,35mm
2	Insulation	Polyvinly chloride	125	Et Kal: 1,00mm thickness
3	Filler	Polyvinly chloride	182	Et Kal: 0,60mm thickness
4	Outer sheath	Polyvinly chloride	136	Et Kal: 1,50mm thickness