

DRS KABEL

Specifications

Cross Section : 4x185mm² NYY SECTOR

Voltage : 0,6/1kV (1,2kV)

Diameter :
(mm) 55,3

Weight :
(kg/km) 9.267


Conductor DS Resistance Ohm/km (20°C)

0,0991

Current Carrying Capacity

In Ground at 20 °C **406 A**

In Air at 30 °C **374 A**

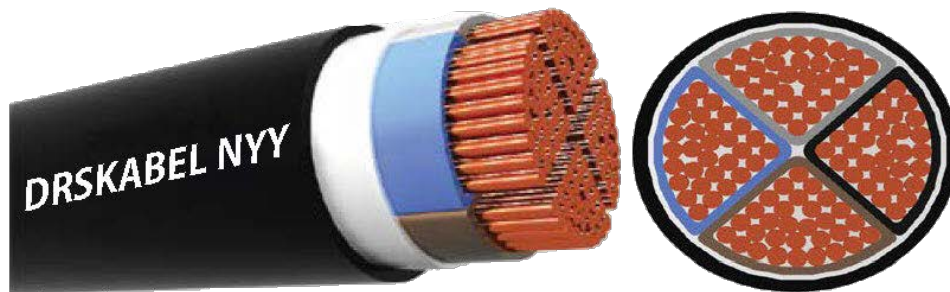

Nr.	Construction	Property	Net Weight (kg/km)	Detail
1	Cu conductor	Sector shape copper	6444	37x2,62mm
2	Insulation	Polyvinly chloride	703	Et Kal: 1,70mm thickness
3	Filler	Polyvinly chloride	1503	Et Kal: 1,30mm thickness
4	Outer sheath	Polyvinly chloride	617	Et Kal: 2,40mm thickness