

DRS KABEL

Specifications

Cross Section : 4x95mm² NYY SECTOR

Voltage : 0,6/1kV (1,2kV)

Diameter :
(mm) 41,7

Weight :
(kg/km) 4.916


Conductor DS Resistance Ohm/km (20°C)

0,193

Current Carrying Capacity

In Ground at 20 °C **280 A**

In Air at 30 °C **246 A**

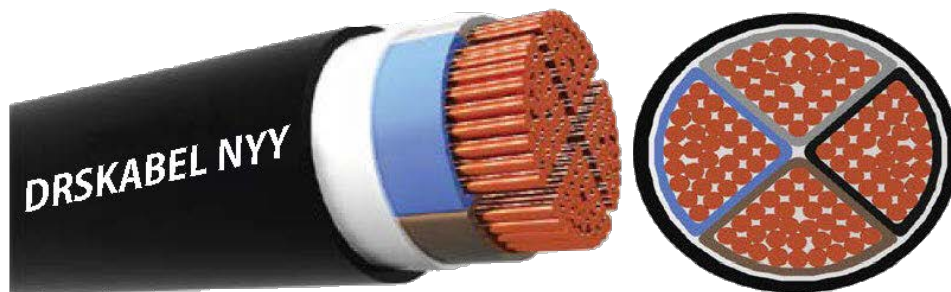

Nr.	Construction	Property	Net Weight (kg/km)	Detail
1	Cu conductor	Sector shape copper	3319	19x2,62mm
2	Insulation	Polyvinly chloride	411	Et Kal: 1,60mm thickness
3	Filler	Polyvinly chloride	824	Et Kal: 1,00mm thickness
4	Outer sheath	Polyvinly chloride	362	Et Kal: 1,90mm thickness