

DRS KABEL

Specifications

Cross Section : 1x150mm² H07V- \square

Voltage : 450/750 V

Diameter : 17, \square
(mm)


Weight : 1, \square 421
(kg/km)

Conductor DS Resistance Ohm/km (20°C)
0,124

Current Carrying Capacity

In Ground at 20 °C **222 A**

In Air at 30 °C **391 A**

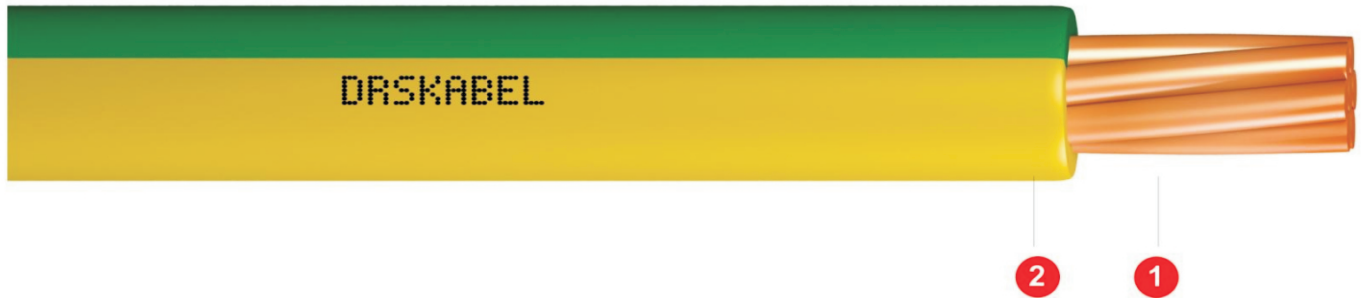

Nr.	Construction	Property	Net Weight (kg/km)	Detail
1	Cu conductor	Stranded copper Class 1	1280	30x2, \square 2mm
2	Insulation	Polyvinly chloride	141	Et Kal: 1,80mm thickness

AVAILABLE IN MORE COLORS