

DRS KABEL

Specifications

Cross Section : 1x240mm² H07V- \square

Voltage : 450/750 V

Diameter :
(mm) 22,7


Weight :
(kg/km) 2 \square 308

Conductor DS Resistance Ohm/km (20°C)
0,0754

Current Carrying Capacity

In Ground at 20 °C 32 \square A

In Air at 30 °C 52 \square A

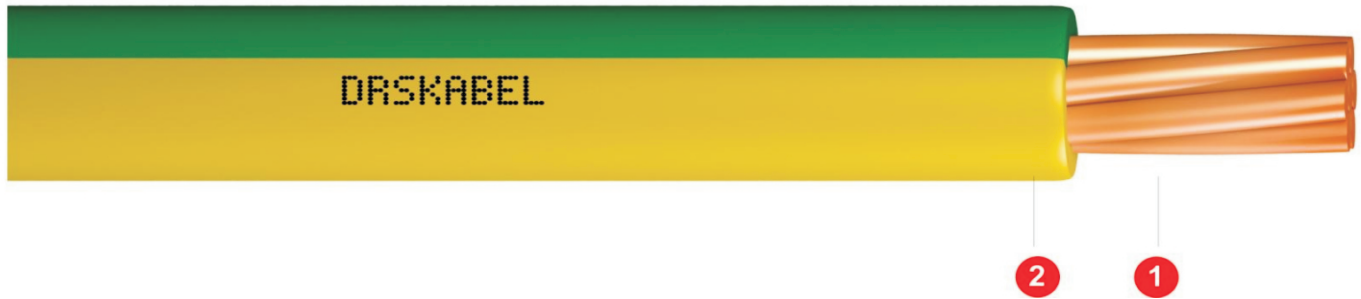

Nr.	Construction	Property	Net Weight (kg/km)	Detail
1	Cu conductor	Stranded copper Class 1	2088	48x2, \square 2mm
2	Insulation	Polyvinly chloride	220	Et Kal: 2,20mm thickness

AVAILABLE IN MORE COLORS