

# DRS KABEL

## Specifications

Cross Section :  $1 \times 4 \text{ mm}^2$  H07V-2 (TS EN 50525-2-31)

Voltage : 450/750 V

Diameter :  
(mm) 4,7

Weight :  
(kg/km) 66


Conductor DS Resistance Ohm/km (20°C)

3,08

Current Carrying Capacity

In Ground at 20 °C 3 A

In Air at 30 °C 5 A

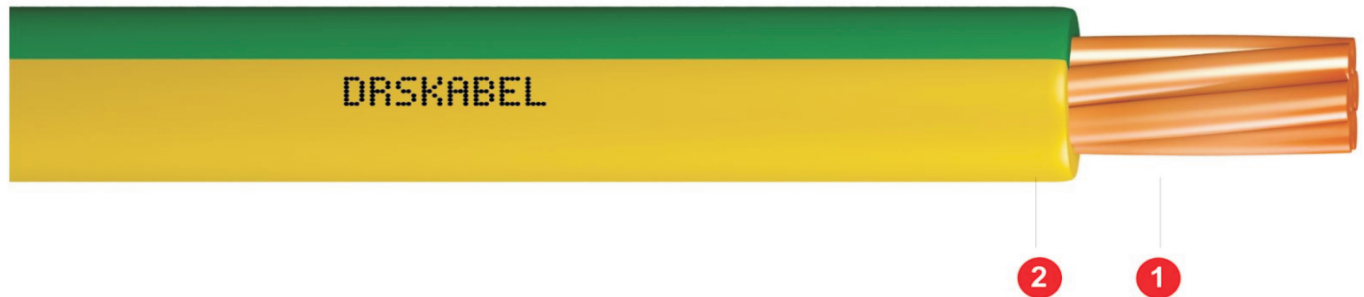

Nr.	Construction	Property	Net Weight (kg/km)	Detail
1	Cu conductor	Stranded copper Class 1	51,2	7x1,03mm
2	Insulation	Polyvinly chloride	14,7	Et Kal: 0,80mm thickness

AVAILABLE IN MORE COLORS